


# Instruction for Measuring Storm Windows (Double Hung, Slider, Picture, Basement)

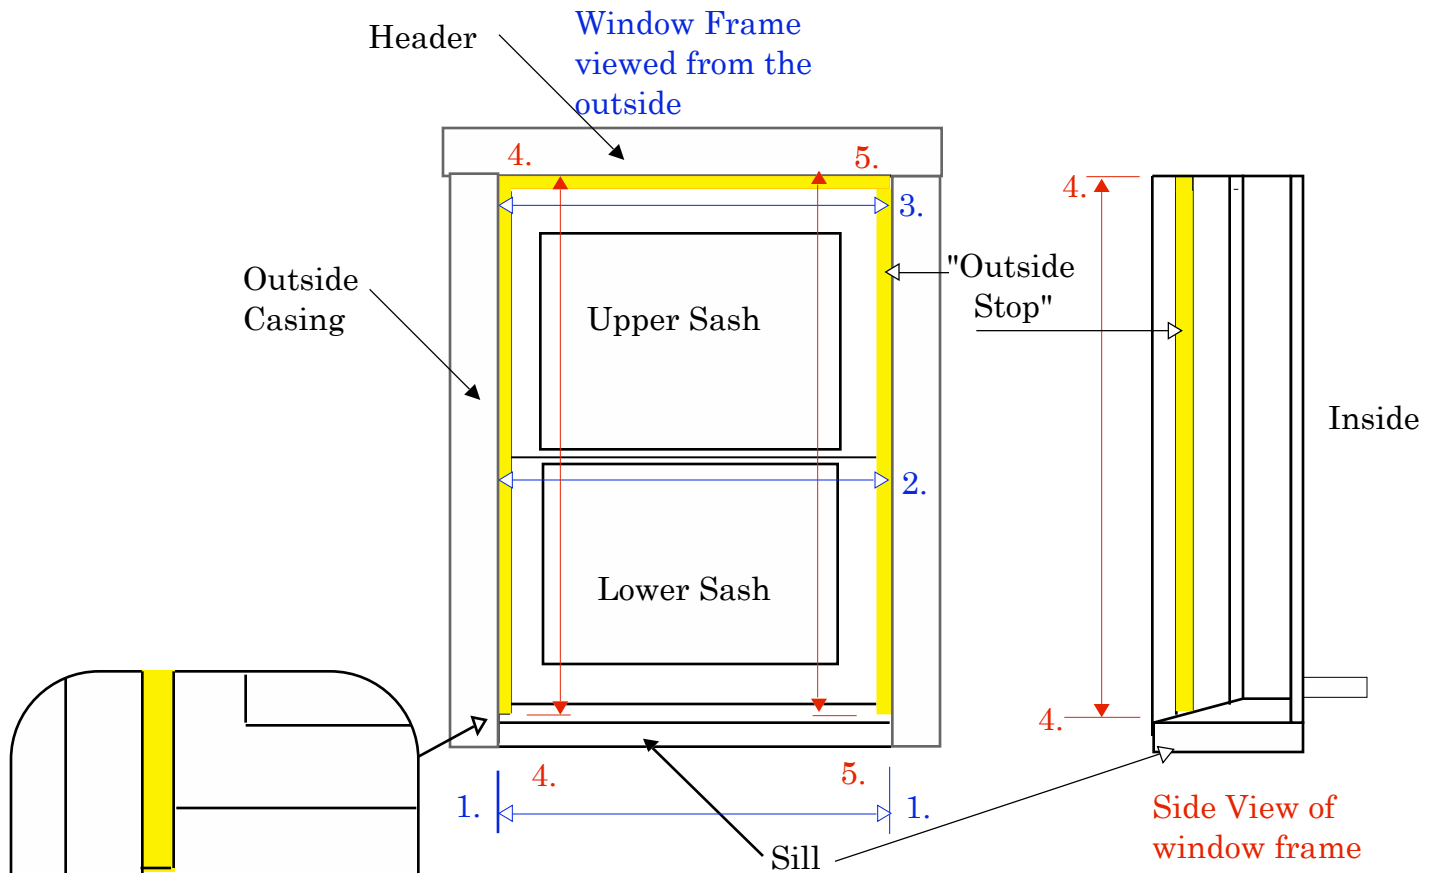

There is a rail on the outside of the window frame called the "outside Stop" (some times called the blind stop) that holds the upper sash in place. This Stop is also where you attach the flange of the storm. See area marked in yellow.

1. Measure the width of the window frame at three places 1,2,3, and the height in two places 4,5. This is called the window opening size.

See Installing Vinyl Storm Windows Adv#

1 800 346-1995

After measuring three or four window frames you will have an idea of how square your house is. There should be no more than an 1/8" difference in any width or height measurement. Make your measurements to 1/16". We will want the smallest measured width, & height of each opening. If there is a difference in measurement of 1/4" or more we need to know.

KEL-EEZ® Windows Bldg One The Die-Gem Way Akron Oh 44312-1539  
Copyright KEL-EEZ 1971 - 2008 All Rights Reserved

KEL-EEZ and PEEL N STICK are Registered Trademarks with the United States Patent & Trademark Office

Adv #